

# FRANK | Product List

valid as of 1 April 2014



## Cresco®

expanding waterstop






## Cresco® expanding waterstop

Expanding waterstops are used for effective sealing of construction joints, particularly for geometrically demanding joint patterns. The sealing effect is achieved through the expansion of the waterstop upon water penetration into the construction joint. Expanding waterstops are used where new and hardened or old concrete are joined and a construction joint sealing must be created. By using expanding waterstops, groundwater, pressing and non-pressing water are prevented from penetrating into the concrete.

- Long-lasting swelling capacities
- Exceptional resistance to chemical attack
- Reliable, uniform and reversible swelling properties
- Outstanding profile stability with sure reversible swelling properties
- Expands in a controlled manner
- Suitable for water exchange zones
- No concrete flaking due to controlled expansion behaviour
- Simple and secure fixing with the Cresco® fixing glue for base / slab connections
- No permanent edging formwork required
- Cresco® expanding waterstops fulfil the requirements of the DBV data sheet "injection hose systems and expandable joint inserts".

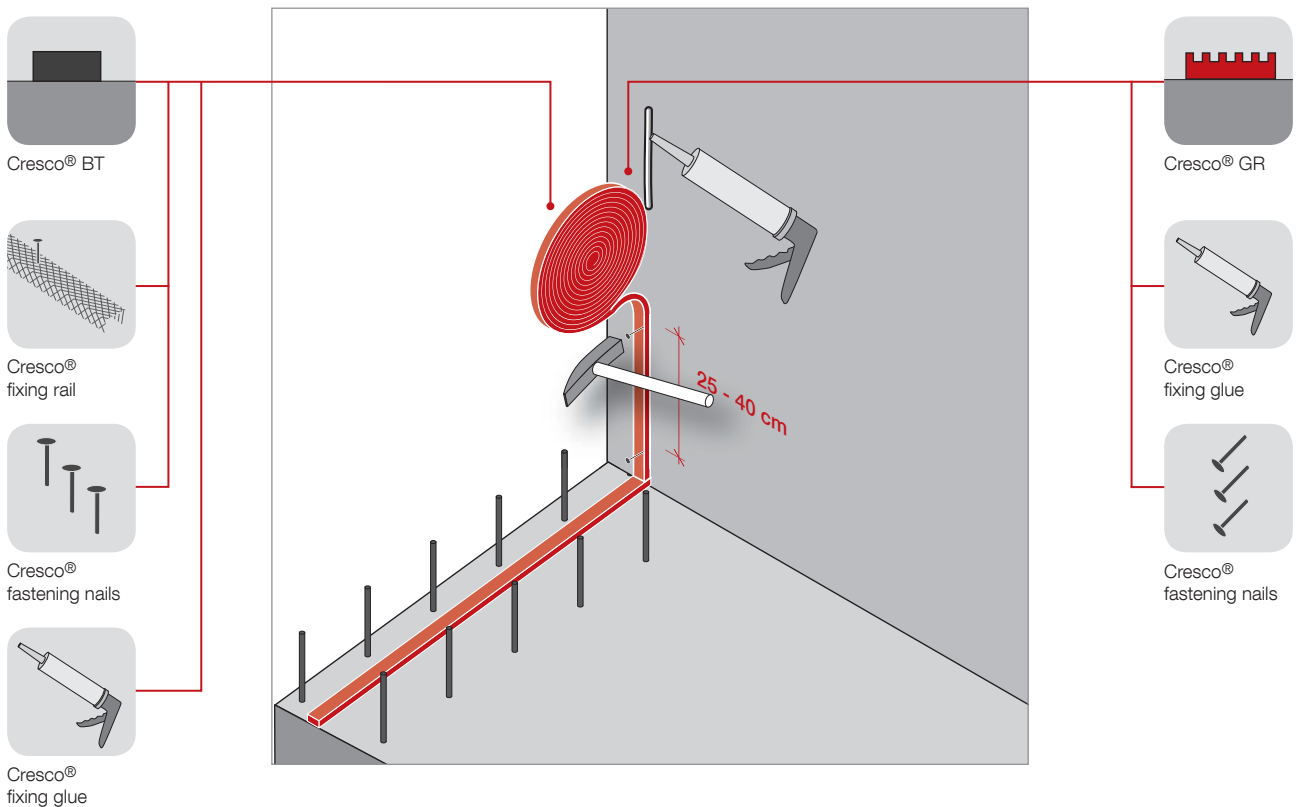

### Cresco® BT expanding waterstop

Art. no.	Dimensions mm	Roll length m	Carton contents piece	Cartons/pallet	Weight kg/m	Weight kg/pallet
QUBCRESBT25	20 x 25	5	4	56	0.63	726

### Cresco® GR expanding waterstop

Art. no.	Dimensions mm	Roll length m	Carton contents piece	Cartons/pallet	Weight kg/m	Weight kg/pallet
QUBCRESGR	22 x 6	15	9	36	0.14	676

### Cresco® fixing glue / expanding waterstop

for fixing of expanding waterstops

Art. no.	Carton contents piece	Cartons/pallet	Weight kg/pce.	Weight kg/carton
QUBMKL	20	60	0.50	10.00

310 ml cartridge is sufficient for 8 - 10 m; MS-polymer-hybrid glue also resistant to weathering and UV radiation.

### Cresco® fixing rail

for Cresco® BT

Art. no.	Carton contents piece	Length cm	Weight kg/m	Weight kg/carton
QBSSBG	20	100	0.05	1.00

### Cresco® fixing nail

Art. no.	Pack size	Length mm	Weight kg/pce.	Weight kg/carton
QUBNAGEL	100 pcs./carton	52	0.01	0.72

with pre-attached disk suitable for nailgunning (only in conjunction with fixing mesh)

### Test certificates

- General test certificate issued according to the regulations of the construction supervising authorities
- Corresponds to recent WU-guideline, also suitable for areas of alternating moisture penetration



**Max Frank GmbH & Co. KG**

Technologies for the construction industry

Mitterweg 1  
94339 Leiblfling  
Germany

Phone +49 9427 189-117  
Fax +49 9427 1588

[info@maxfrank.com](mailto:info@maxfrank.com)  
[www.maxfrank.com](http://www.maxfrank.com)